

FIG. 1

1/8

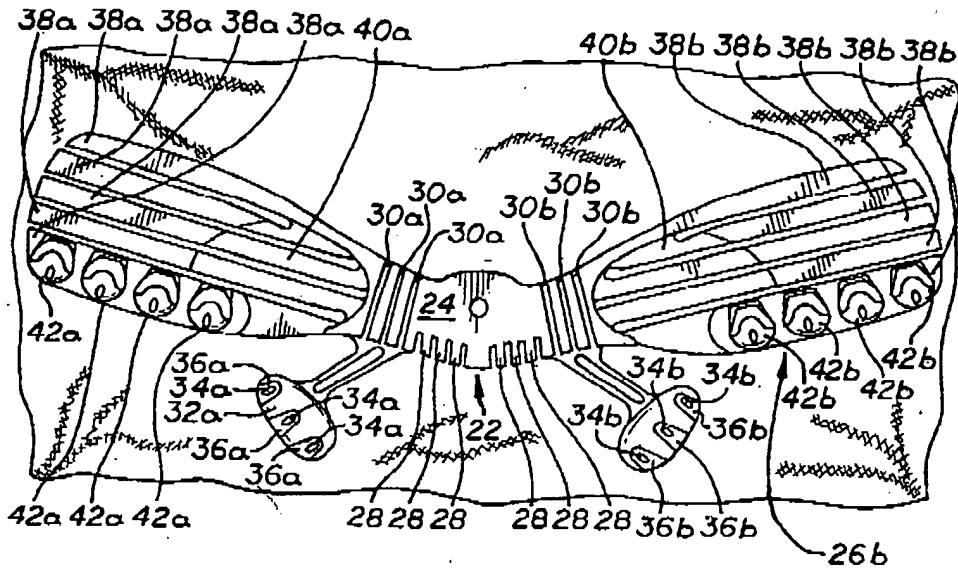


FIG. 4




FIG. 5


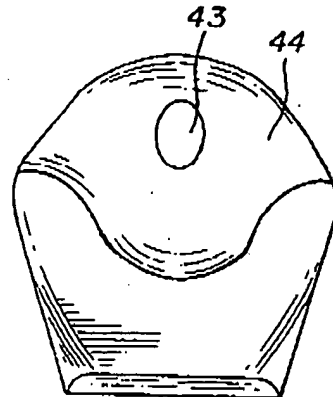


FIG. 6



2/8


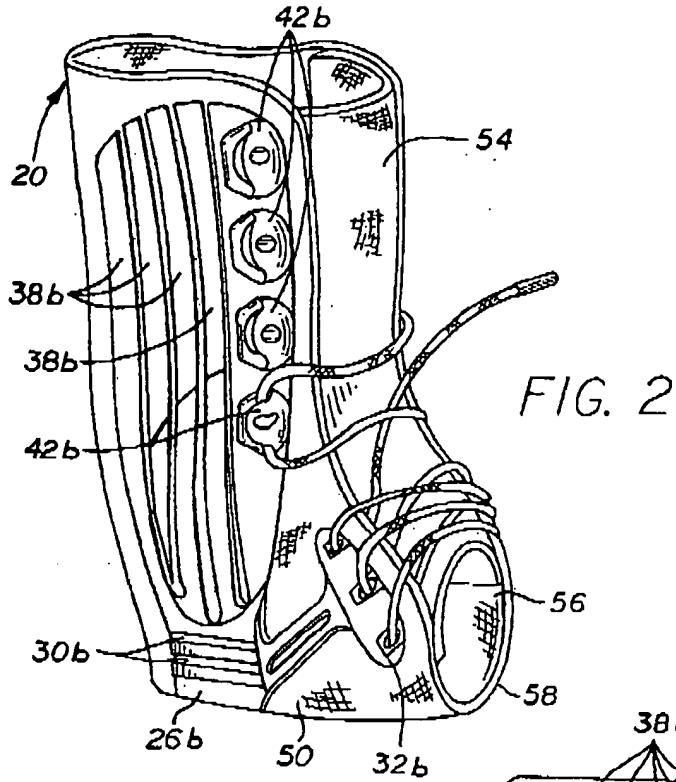


FIG. 3

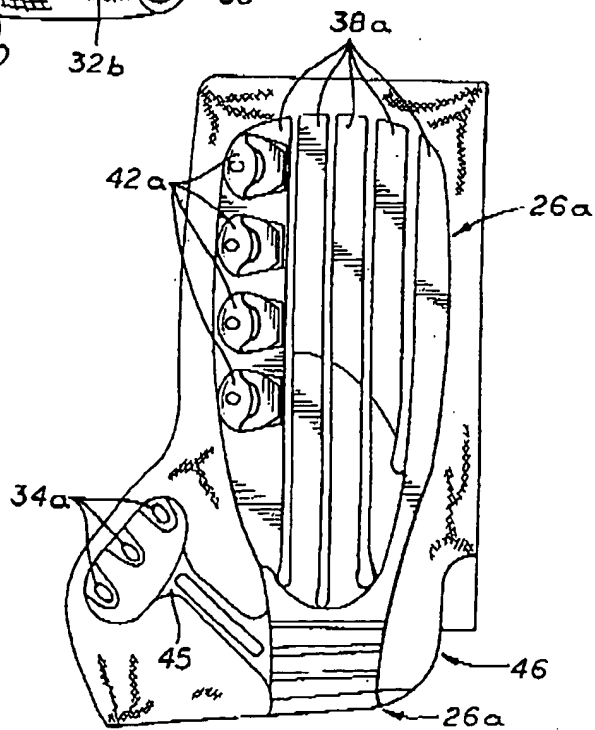

3/8

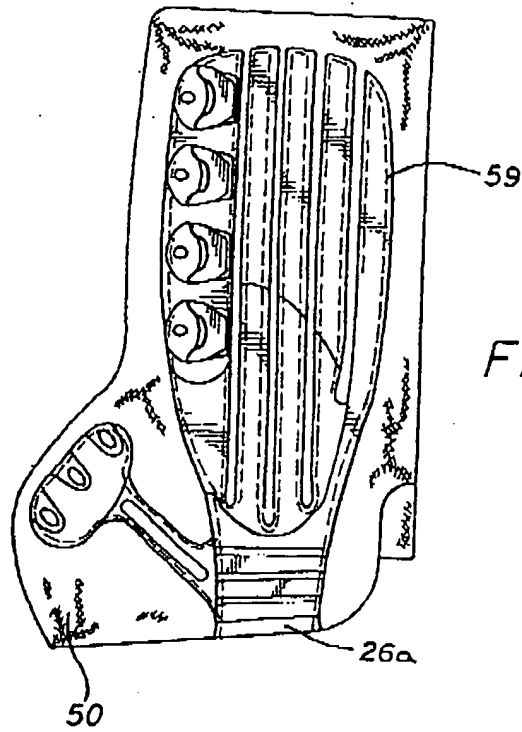


FIG. 8

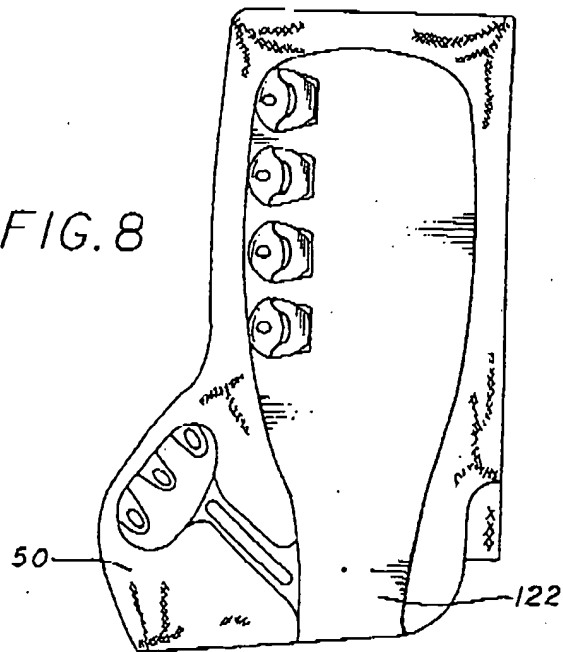


FIG. 9






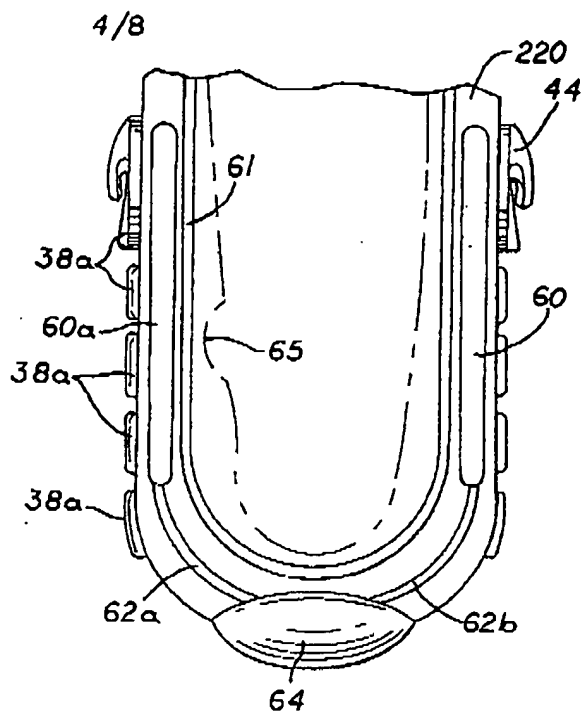


FIG. 10

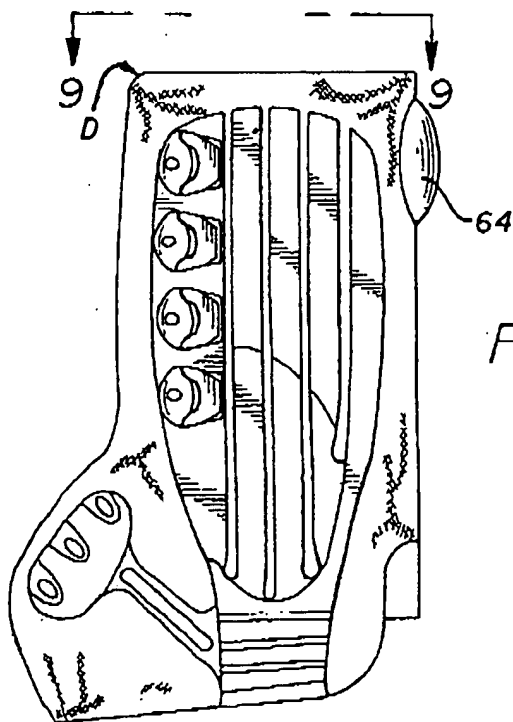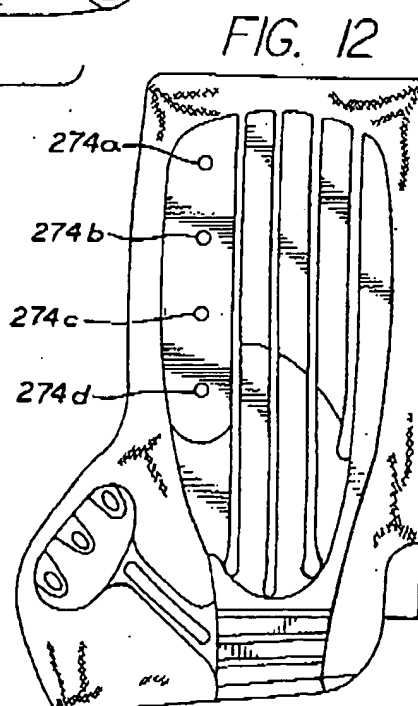


5/8

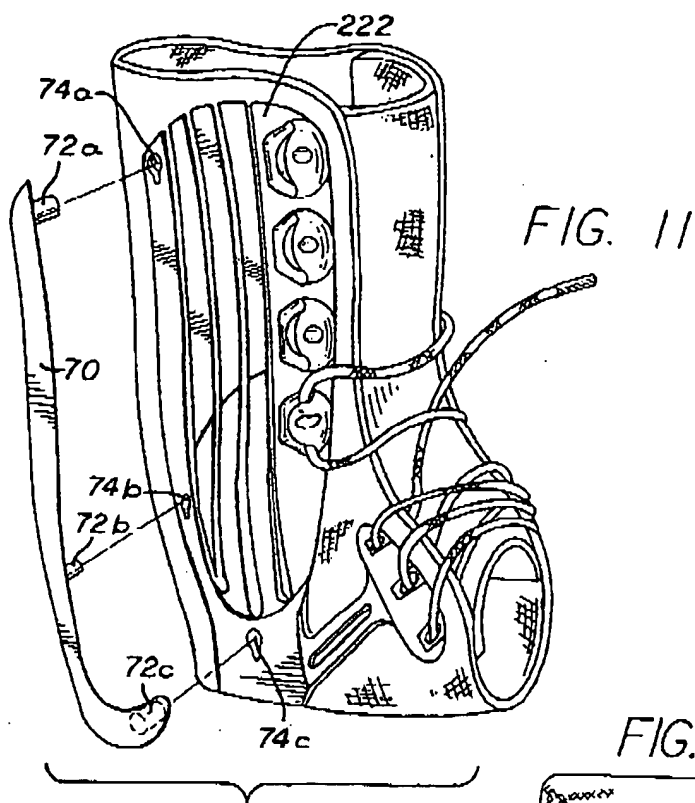

6/8

FIG. 14

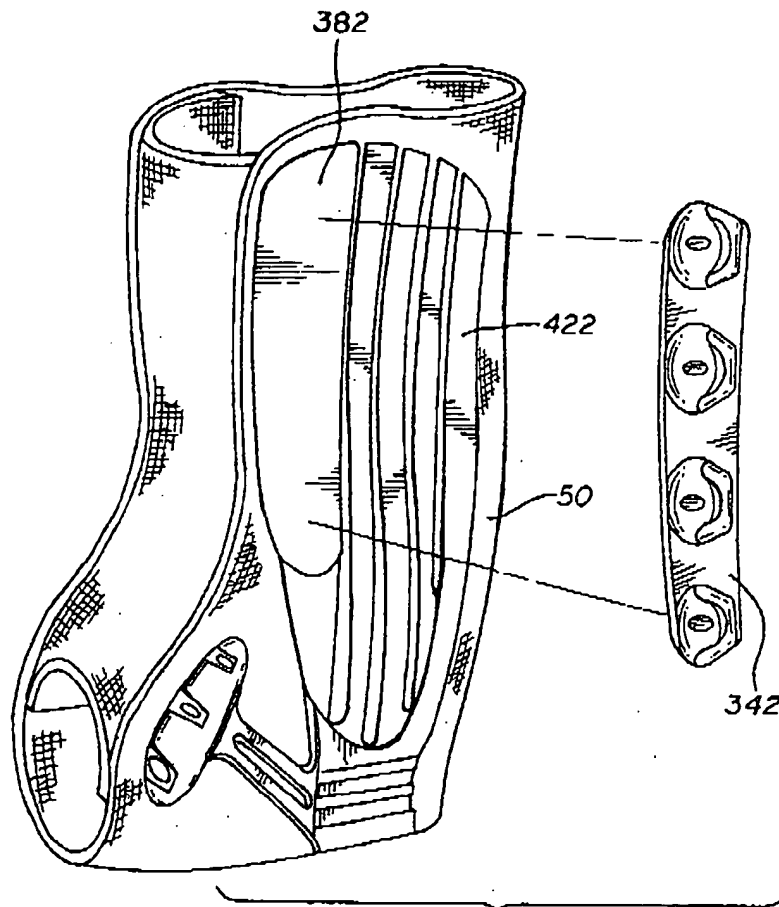

7/8

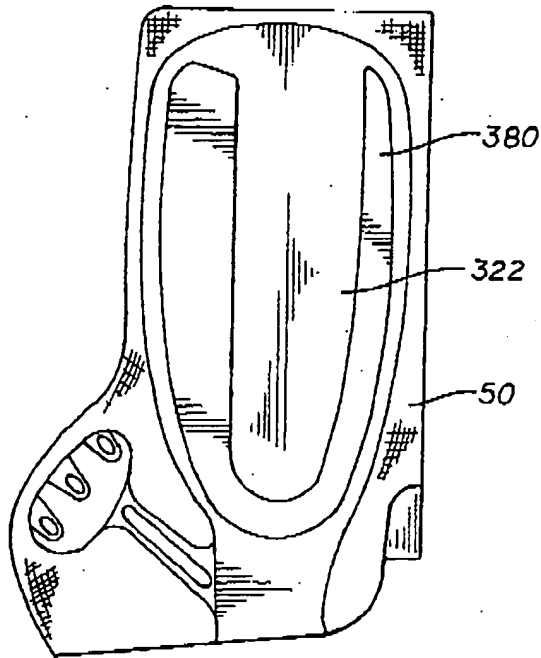


FIG. 13

FIG. 13 is a perspective view of a U-shaped component 50 with a central opening 322 and a side flange 380.

FIG. 16

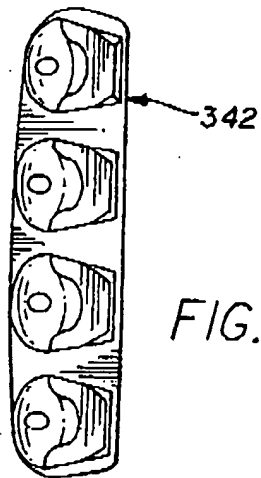
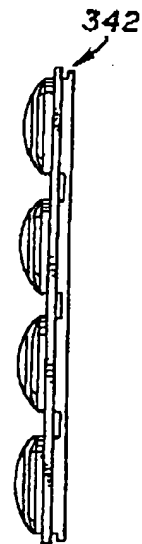
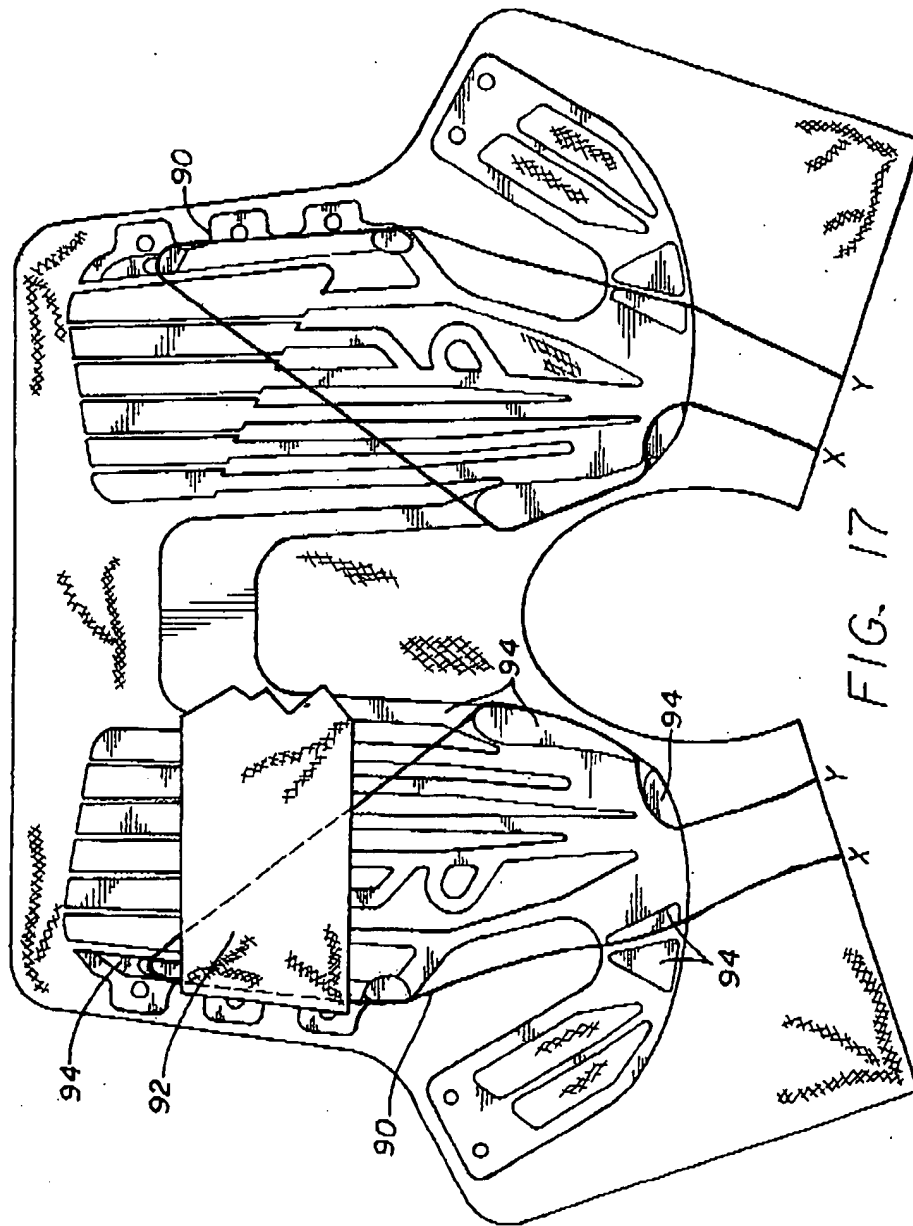
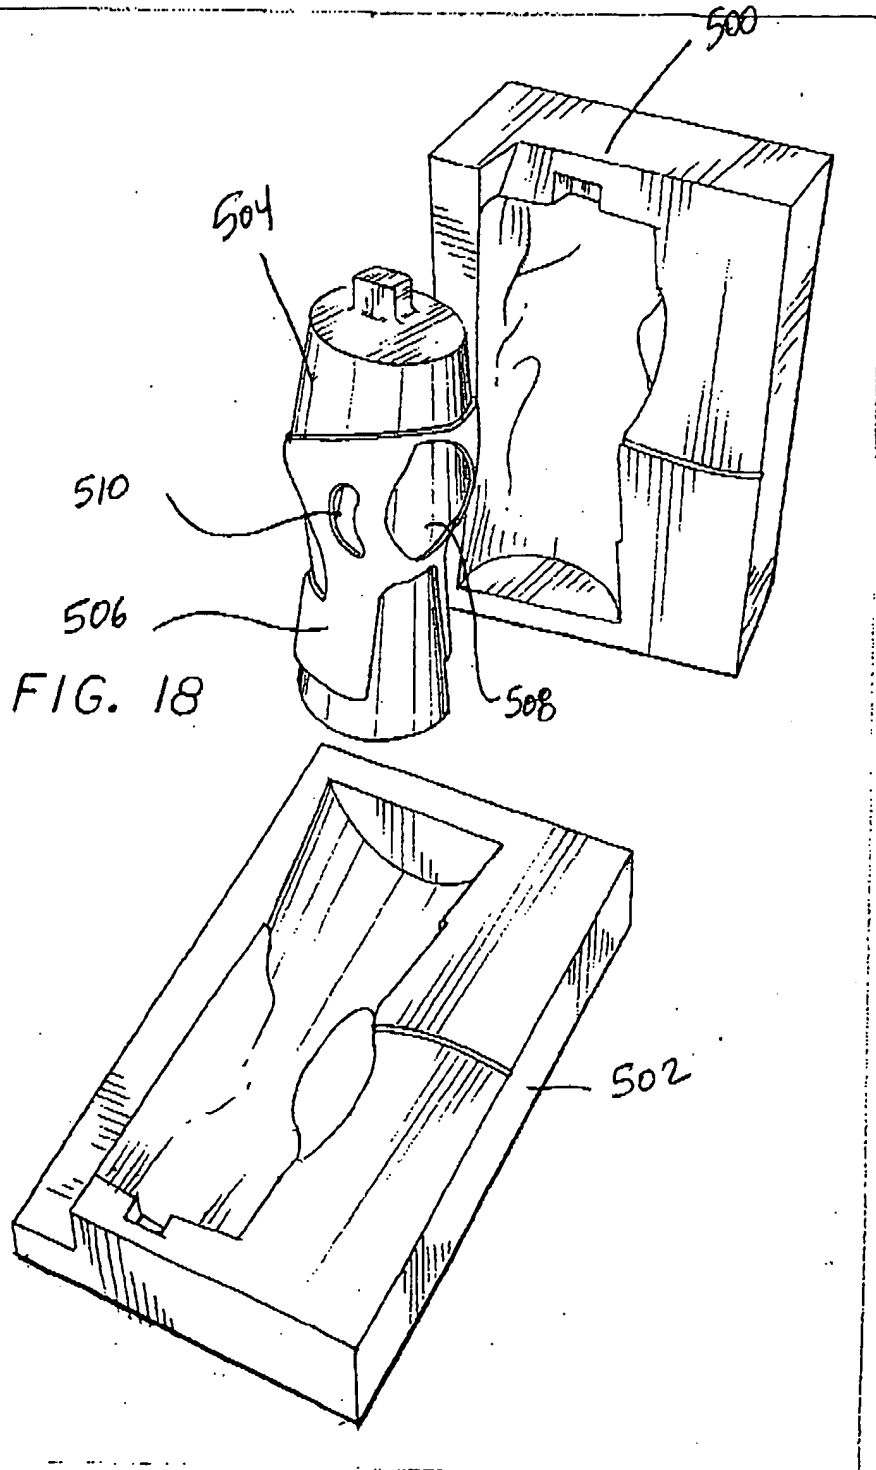



FIG. 15

8/8







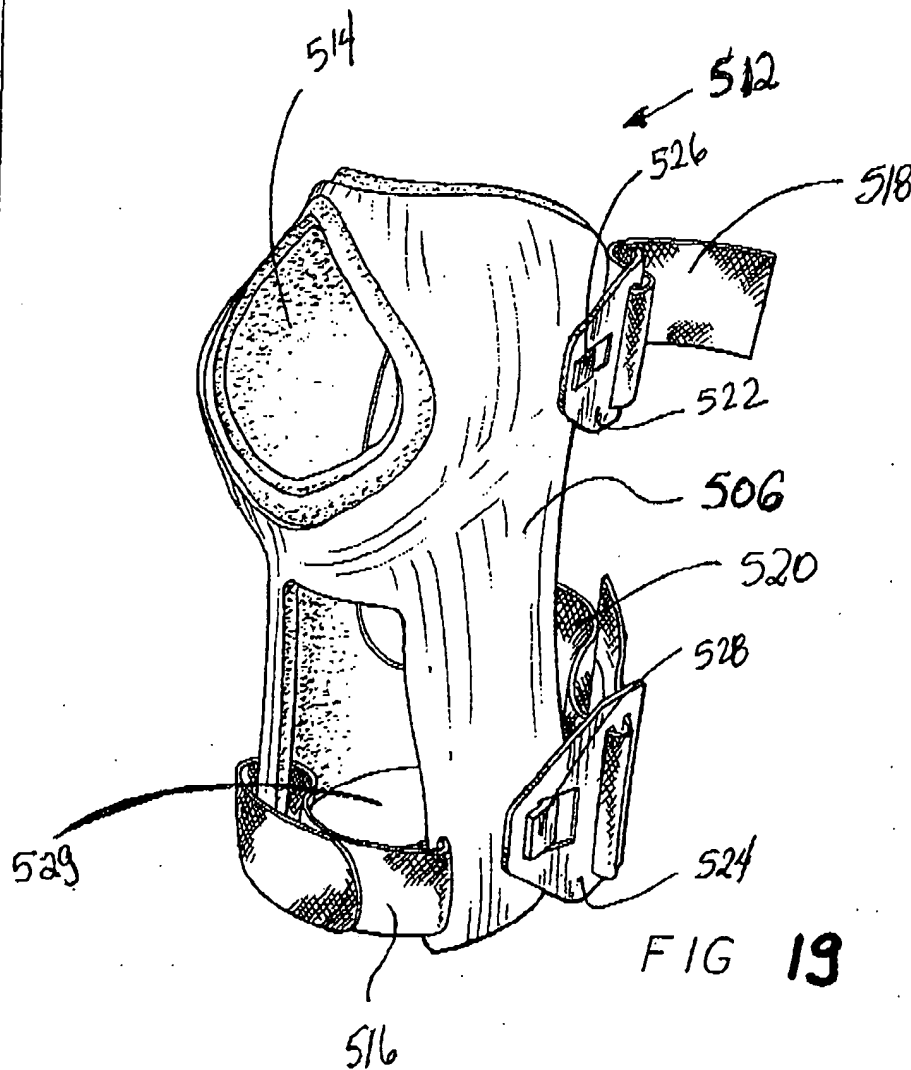

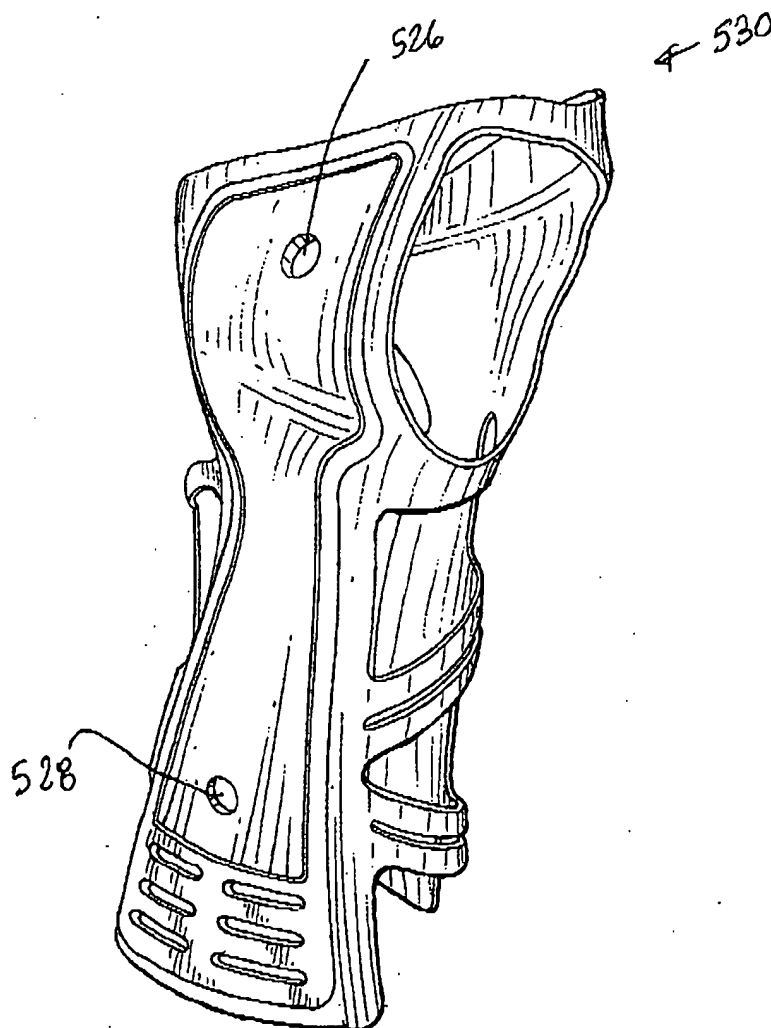


FIG. 20

FIG. 21






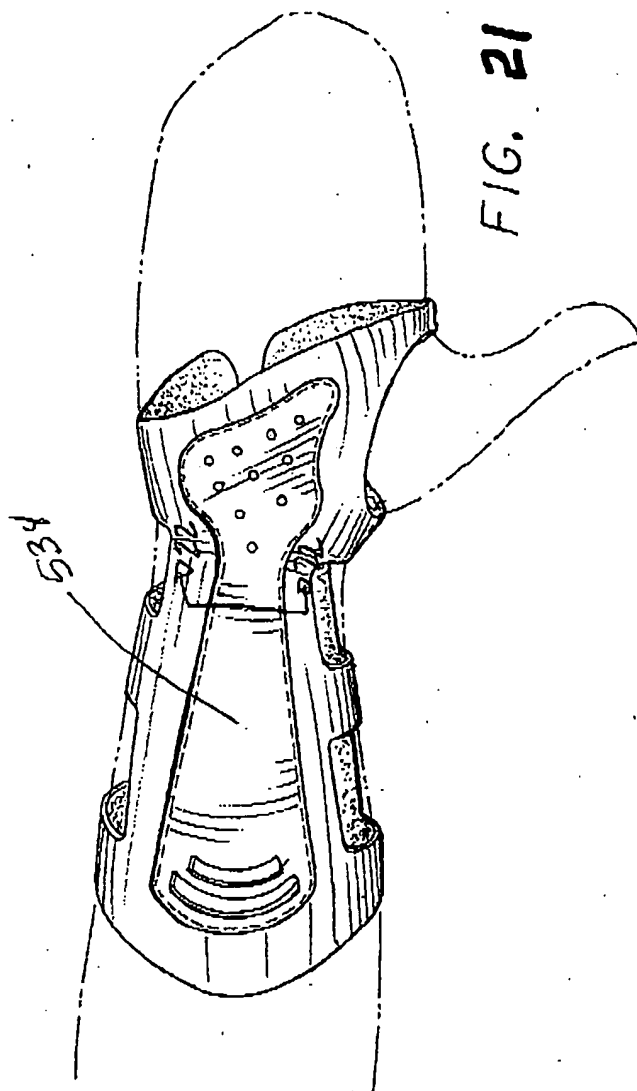


FIG. 21

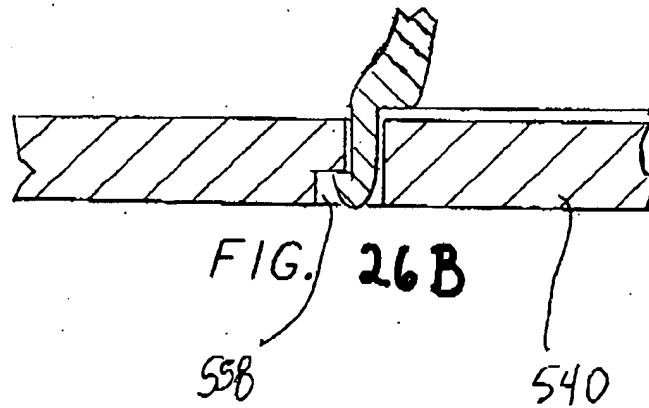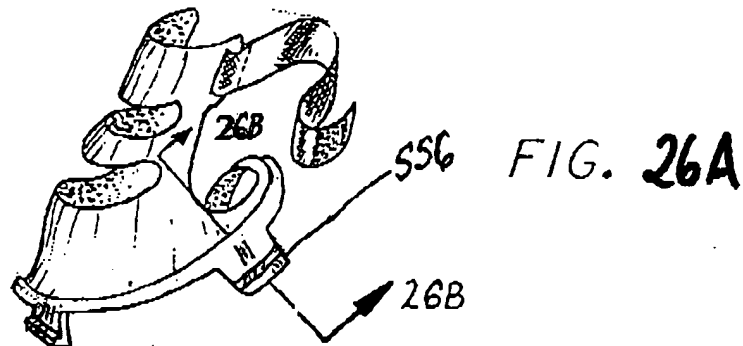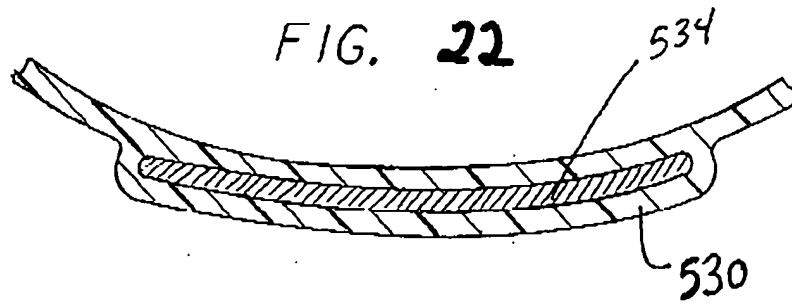


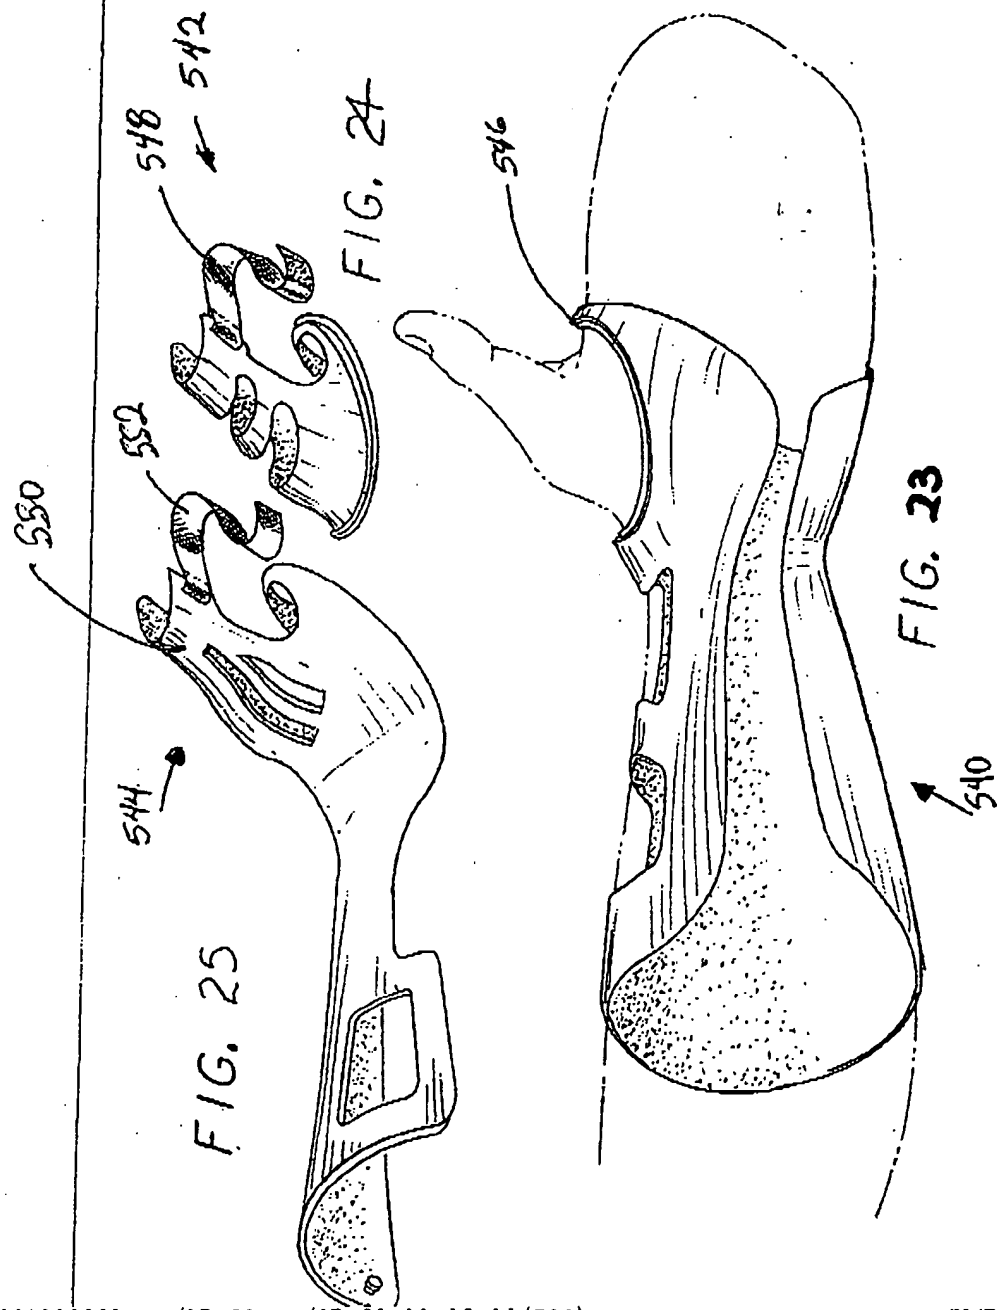

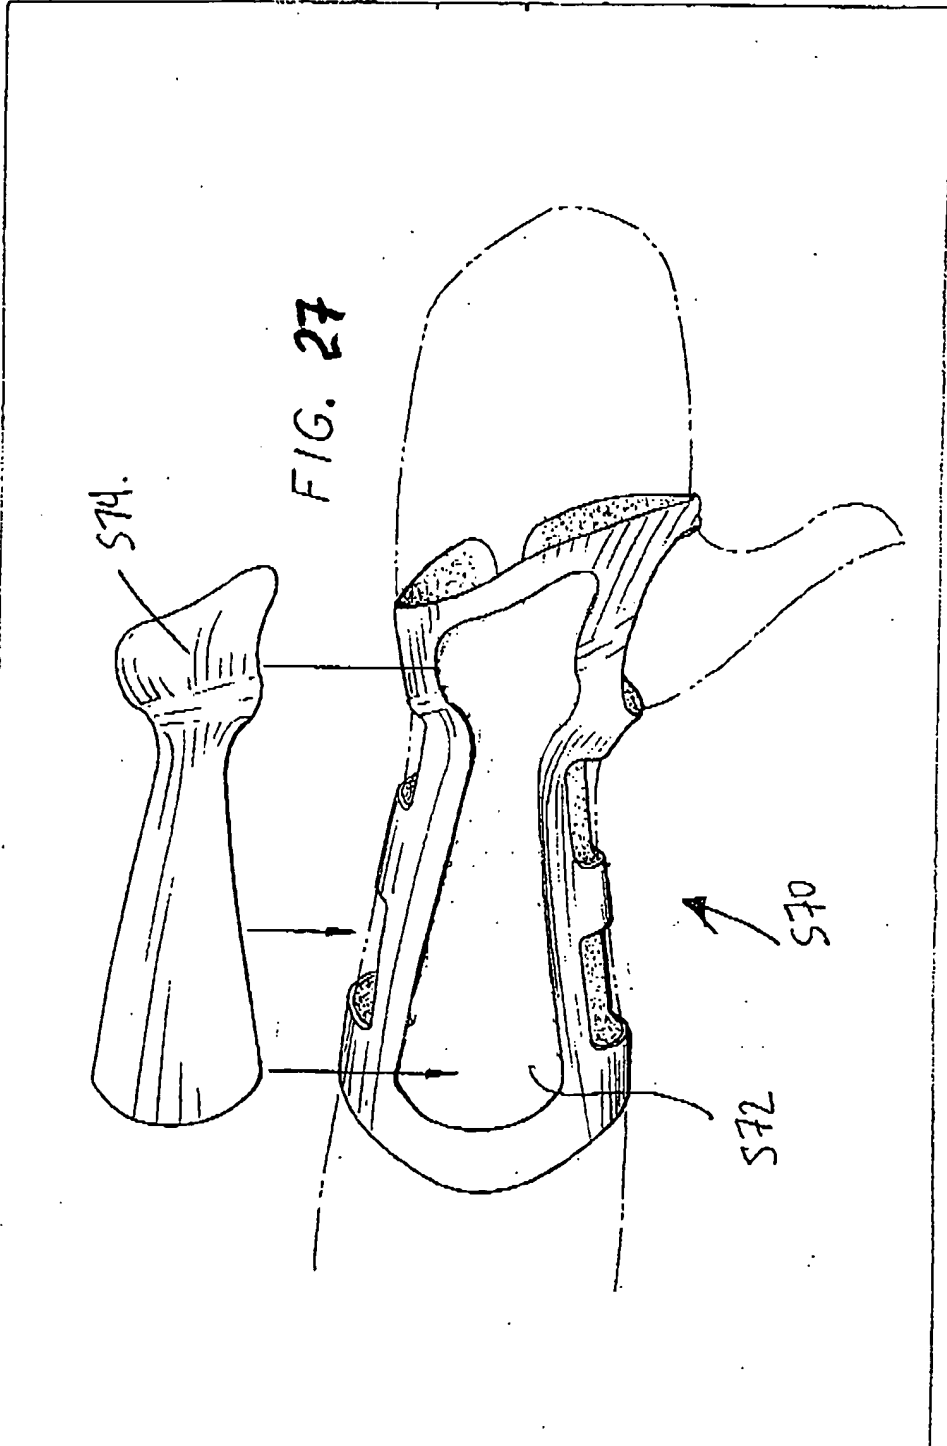

FROM OPPENHEIMER - L. A. (TUE) 10.31'00 15:30/ST. 15:20/NO. 4860087997 P 16

FIG. 28 is a perspective view of the shoe 500 in a closed position, showing the sole 502 and the heel 504.

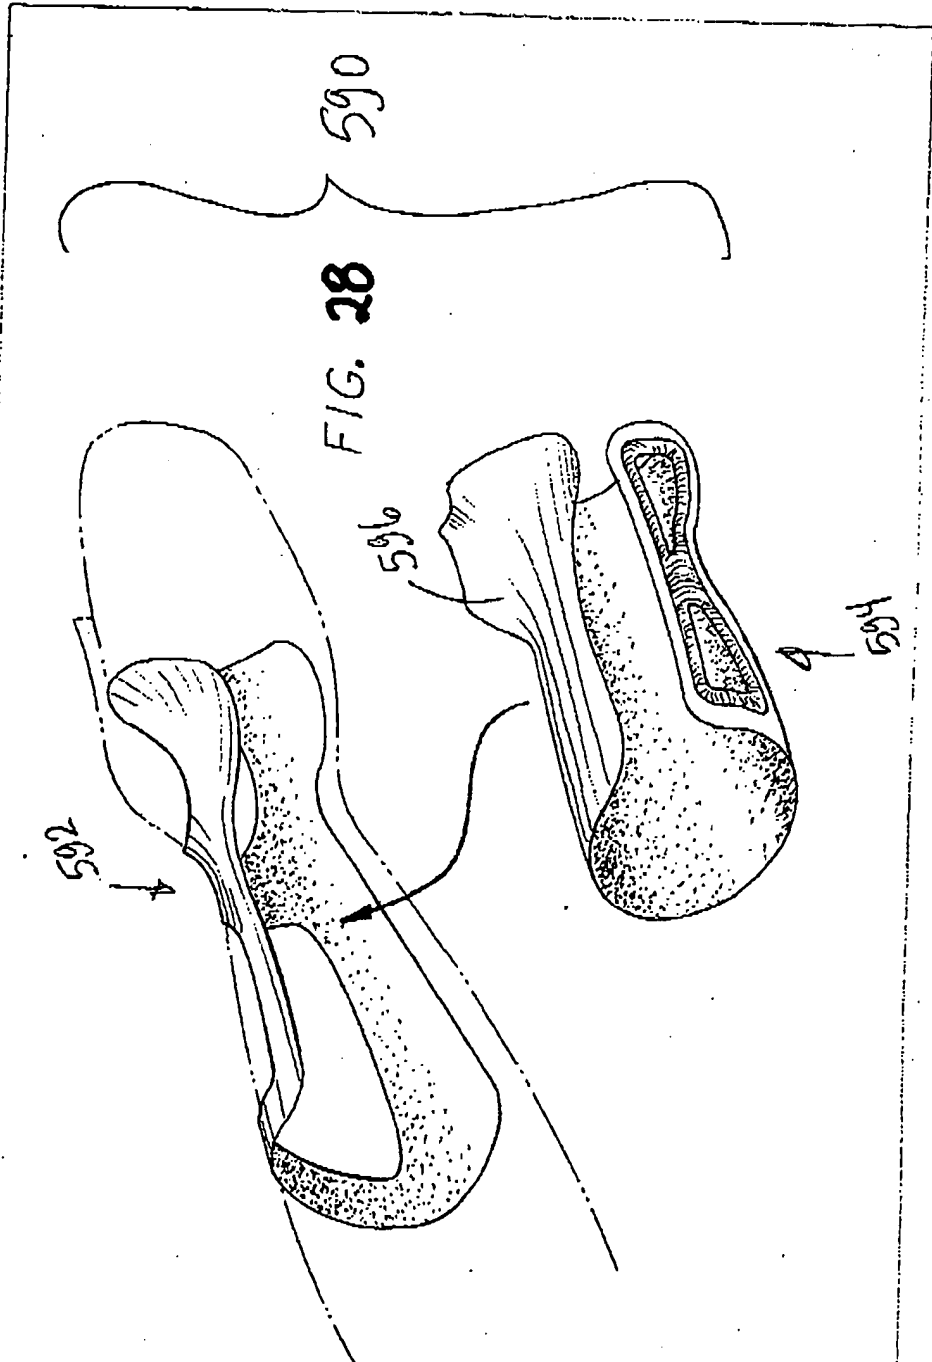






FIG. 33


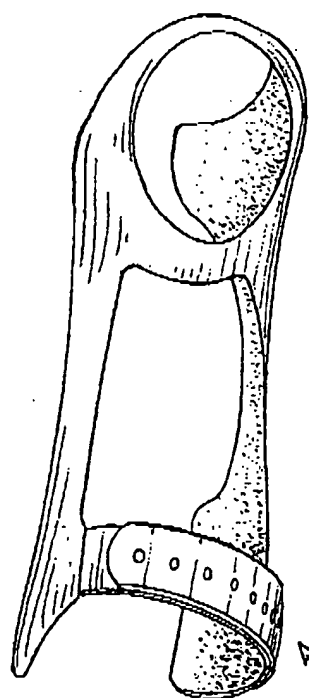


FIG. 33

588

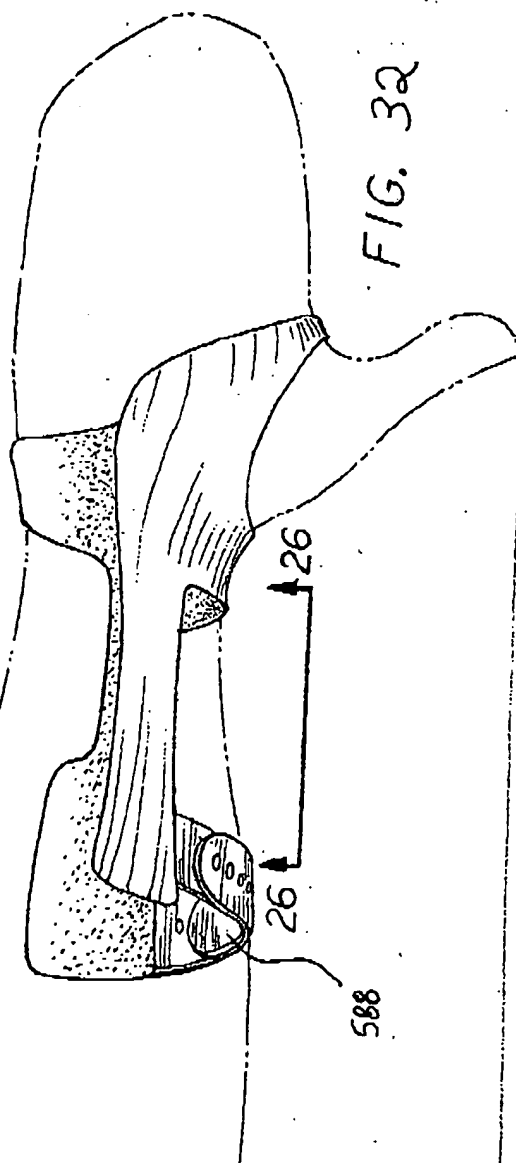

588

FIG. 32

26 26




FIG. 34

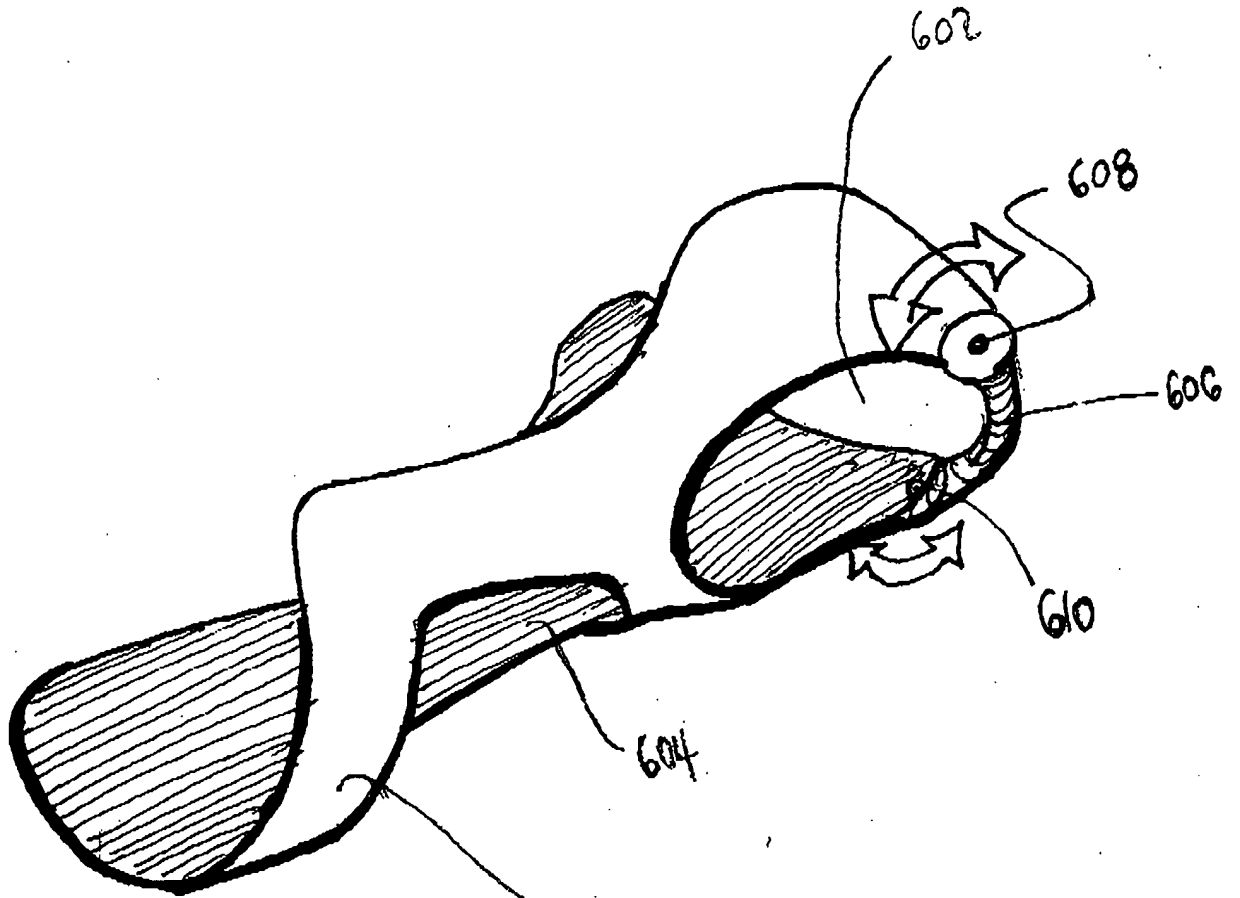


FIG. 35 600

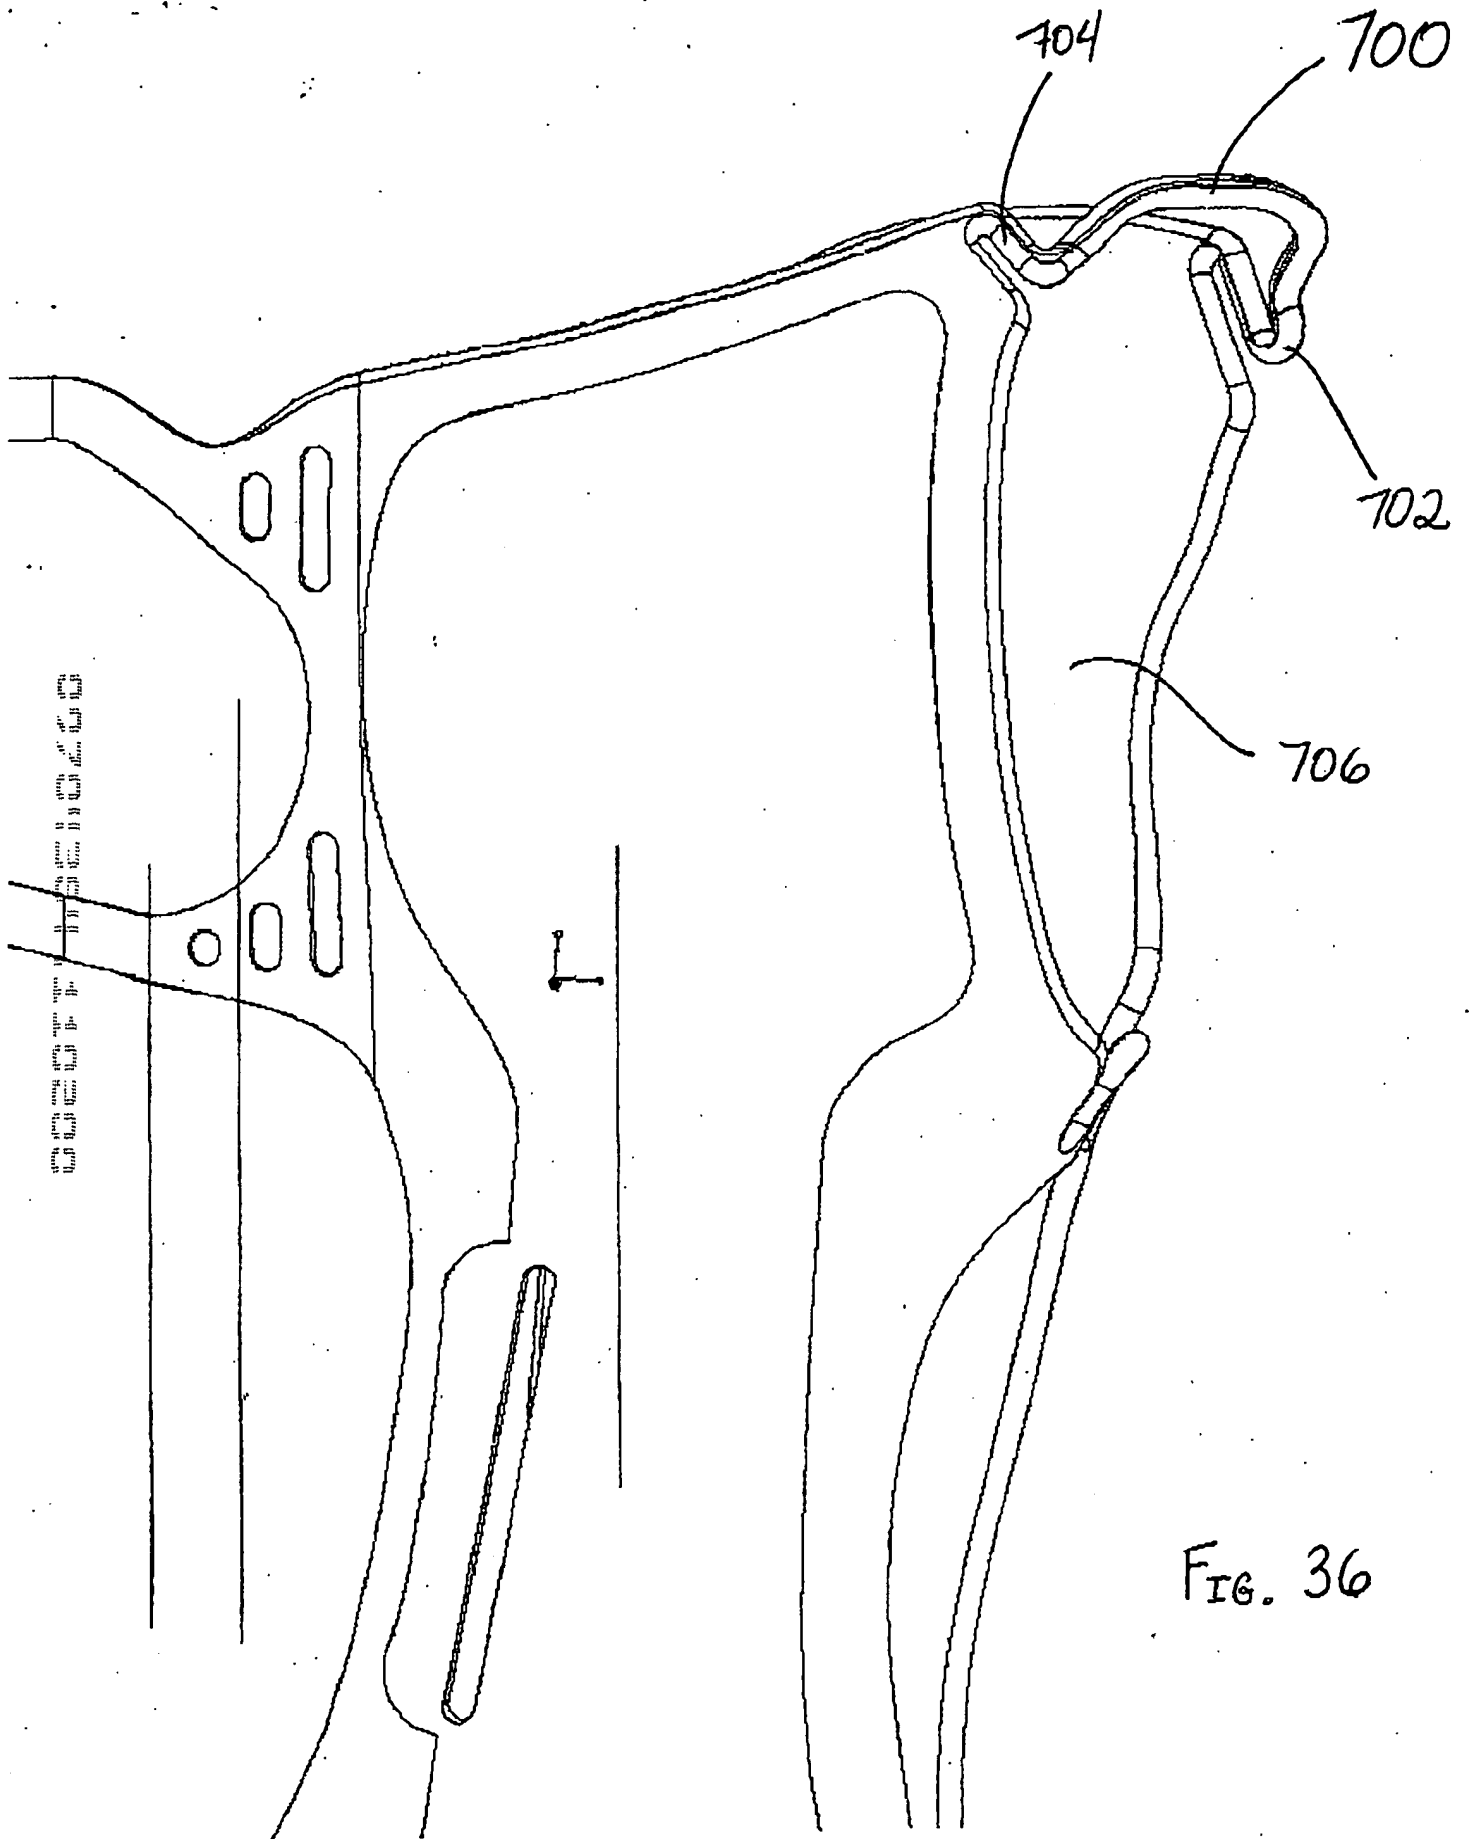


FIG. 36

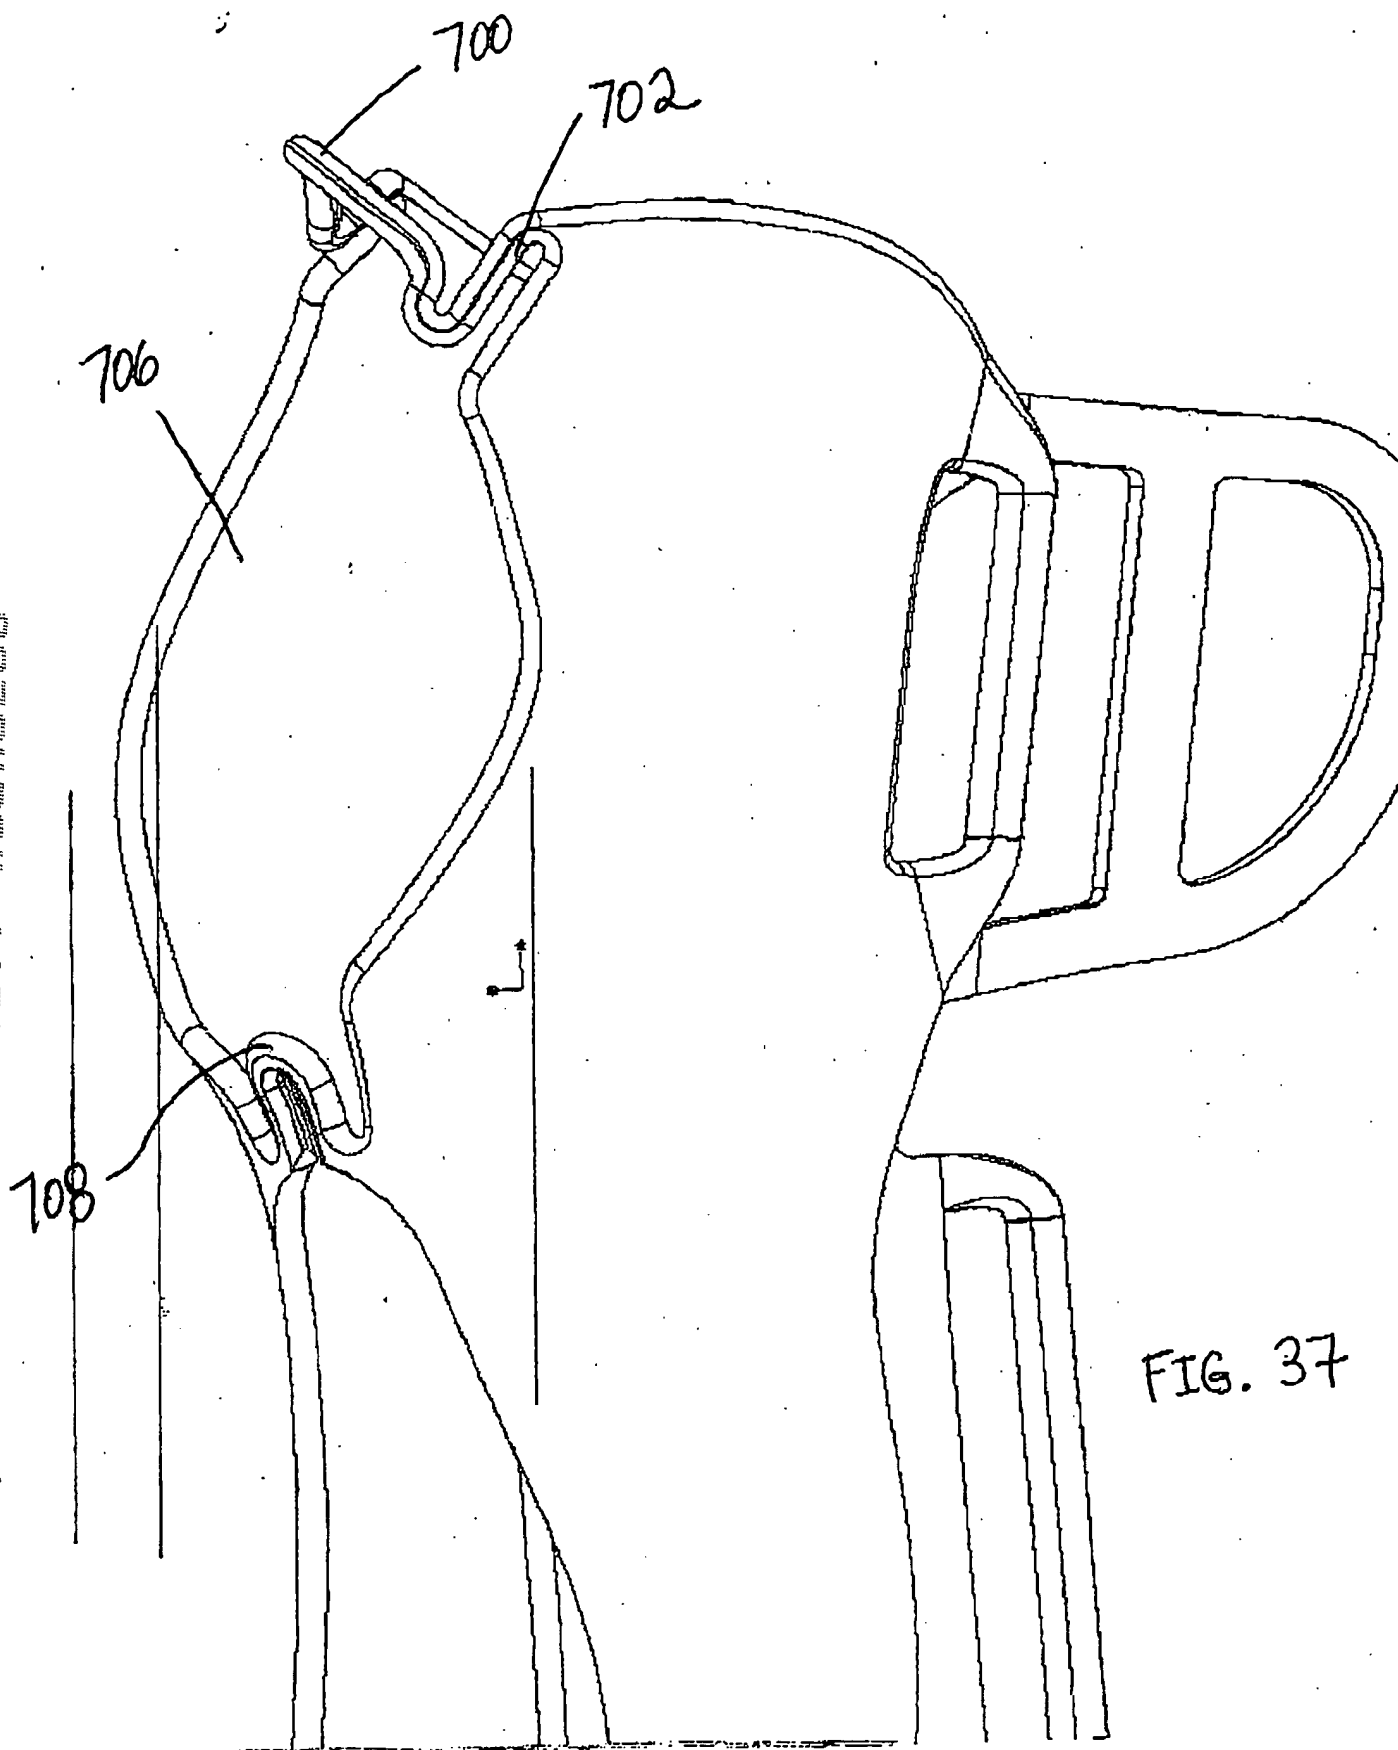


FIG. 37